



**TRAXDA**  
Lift Kits - Made in USA

**Toll free: 888-660-5892**  
**email: info@traxda.com**

**SAFETY WARNING!**

Always use the correct tools, and wear safety goggles. We **STRONGLY** recommend installation by a licensed mechanic on a properly secured locking lift.

**Traxda LLC, 810 E 19th Street  
Tucson, Arizona 85719**

**TIRE FITMENT ADVICE**

The best way to ensure proper tire fitment is to install the kit before purchasing your wheels and tires. Always test fit tires and wheels before purchasing.

**VEHICLE RIDE WARNING!**

Trucks with lift or level kits installed have a higher center of gravity. Aggressive and sudden direction changes may cause a tip over.

**402010 Trailblazer Lift and Level Kit**

This kit contains:

2- Front Spring Preload Spacers

2- Front Top Shim Spacers

2- Rear Spring Spacers

Instructions

Warranty Card

Stickers



**Installation Tips**

**Always use caution handling ABS or wheel sensor wiring. Avoid tension of any kind on wiring harness as this may cause damage or failure.**

1. Trucks are often not level side to side from the factory. Please measure before installation.
2. Re-torque all hardware to manufactures specifications
3. When aligning, to get the best tire wear use our supplied specifications. OEM specifications are for trucks with stock wheels and tires. Larger tires will wear differently.
4. All instructions are written with vehicle on a 2-post lift with tires removed.

**Step 1**

Loosen and remove the upper ball joint nut, tie rod nut, and sway bar nut.

A hammer may be needed to break the ball joint and tie rod free.


**Special Note:**

On 4X4 models you must remove the drive axle nut. **Failure to follow this step will make removal of the strut difficult.**

**Step 2**

Remove the strut from the vehicle and **mark the strut for proper re-assembly**. Using a spring compressor tool, disassemble the strut and install the TRAXDA spacer.

\*Refer to Figure A for proper placement.

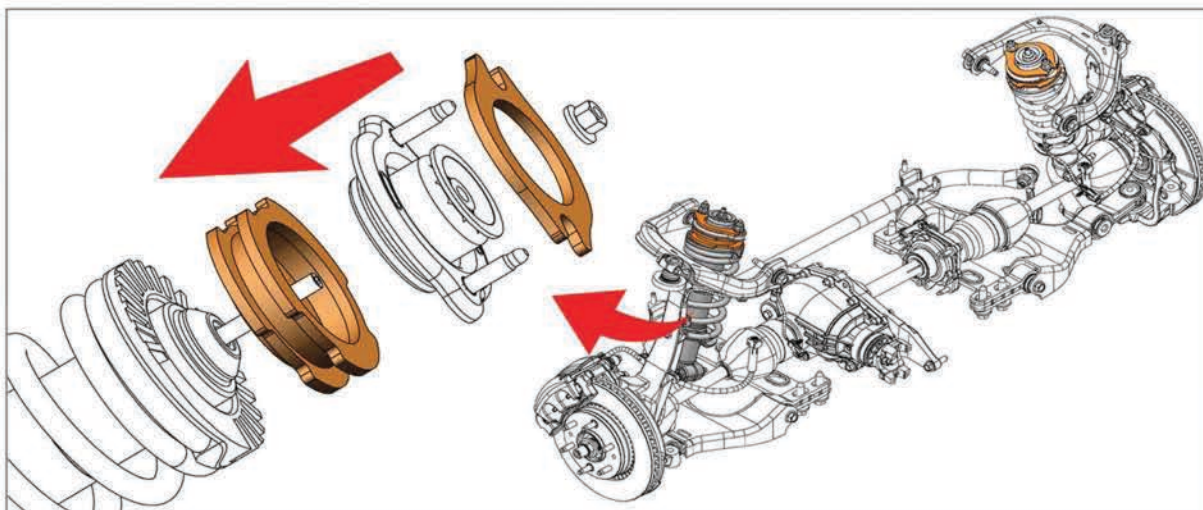

**Figure A**

Illustration is for reference only. Part dimensions will vary from kit to kit.

Installation Instructions continued on reverse





**TRAXDA**  
Lift Kits - Made in USA

**Toll free: 888-660-5892**  
**email: info@traxda.com**

**SAFETY WARNING!**  
Always use the correct tools, and wear safety goggles. We **STRONGLY** recommend installation by a licensed mechanic on a properly secured locking lift.

**Traxda LLC, 810 E 19th Street**  
**Tucson, Arizona 85719**

**TIRE FITMENT ADVICE**

The best way to ensure proper tire fitment is to install the kit before purchasing your wheels and tires. Always test fit tires and wheels before purchasing.


**VEHICLE RIDE WARNING!**

Trucks with lift or level kits installed have a higher center of gravity. Aggressive and sudden direction changes may cause a tip over.

**402010 Installation Instructions continued**

**Rear Installation**

Support the weight of the rear axle and remove one rear shock. Be careful of the brake hoses they will be at maximum extension while installing this piece. With the shock removed the spring should come out easily. Install the TRAXDA spring spacer into the vehicle as shown in Figure B using the supplied 10mm bolt. Fit the cone shaped bump stop onto the spacer and have an assistant use a pry bar to lever the spring back into place. Reinstall the shock and repeat on the other side.

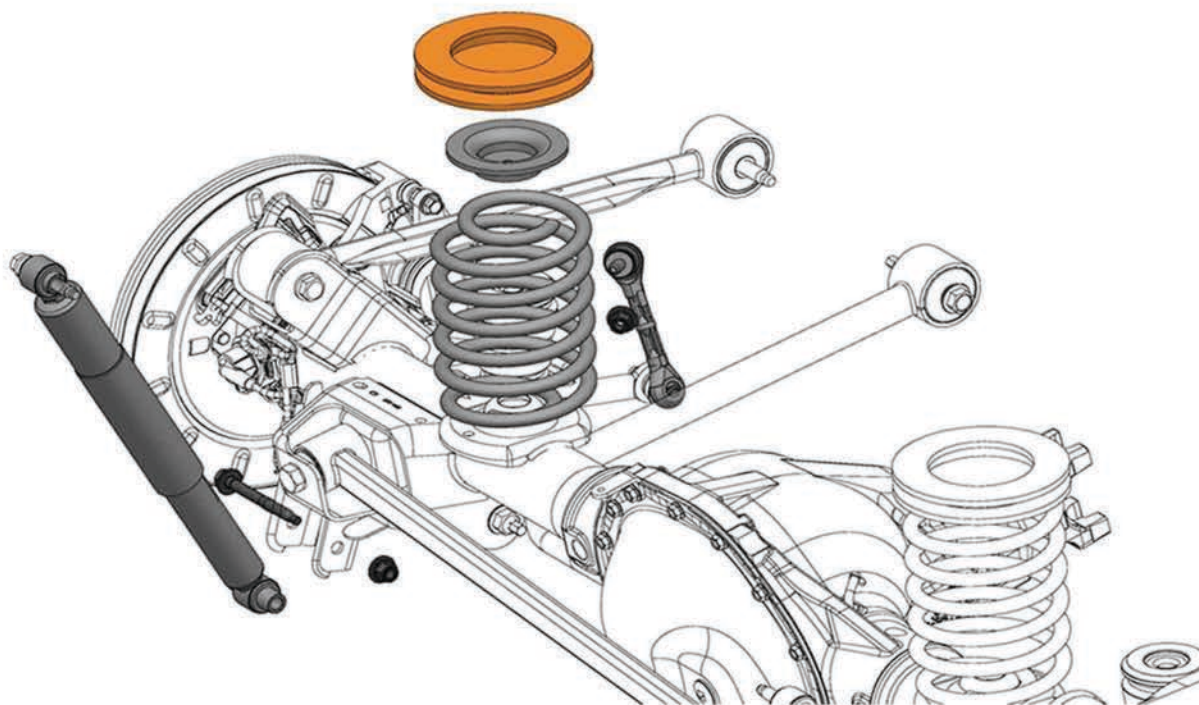

**Alignment notes:**

We recommend that a technician with experience doing alignments on lifted trucks perform the alignment. Large tires wear differently than OEM sized tires. Always do an alignment after changing tires on a vehicle.

Alignment Specs	Left	Right
Caster (degrees)	2	2.5
Camber (degrees)	-.50	-.50
Toe (inches)	1/16 or .0625 toe in	
Other Notes	Rear is not adjustable	