

ROUGH COUNTRY
SUSPENSION SYSTEMS®

921106260



10626BAG

27.11
(688.7 mm)

JEEP 2007-18 JK HD Ball Joint

Thank you for choosing Rough Country for all your vehicle needs.

Please read instructions before beginning installation. Check the kit hardware against the kit contents shown below. Be sure you have all needed parts and know where they go.

If question exist, please call us @1-800-222-7023. We will be happy to answer any questions concerning this product.

Check all fasteners for proper torque. Check to ensure for adequate clearance between all components.

Periodically check all hardware for tightness.

KIT CONTENTS:

Front Axle Upper Ball Joint x2
Front Axle Lower Ball Joint x2

TOOLS NEEDED:

Hammer
5mm Allen Wrench
12 Point 13mm Socket
7/8 Wrench
1 1/16 Wrench
1 1/8 Wrench
7mm Wrench
21mm Wrench and Socket
22mm Wrench or Socket
36mm Wrench or Socket
Grease Gun
Die Grinder





Torque Specs:

| Size | Grade 5 | Grade 8 | Size | Class 8.8 | Class 10.9 |
|-------|-----------|-----------|------|-----------|------------|
| 5/16" | 15 ft/lbs | 20ft/lbs | 6MM | 5ft/lbs | 9ft/lbs |
| 3/8" | 30 ft/lbs | 35ft/lbs | 8MM | 18ft/lbs | 23ft/lbs |
| 7/16" | 45 ft/lbs | 60ft/lbs | 10MM | 32ft/lbs | 45ft/lbs |
| 1/2" | 65 ft/lbs | 90ft/lbs | 12MM | 55ft/lbs | 75ft/lbs |
| 9/16" | 95 ft/lbs | 130ft/lbs | 14MM | 85ft/lbs | 120ft/lbs |
| 5/8" | 135ft/lbs | 175ft/lbs | 16MM | 130ft/lbs | 165ft/lbs |
| 3/4" | 185ft/lbs | 280ft/lbs | 18MM | 170ft/lbs | 240ft/lbs |





INSTALLATION INSTRUCTONS



1. Loosen the nut on the tie-rod end using a 21mm wrench. **See Photo 1.**
2. Loosen the nut on the drag link using a 21mm wrench. **See Photo 2.**

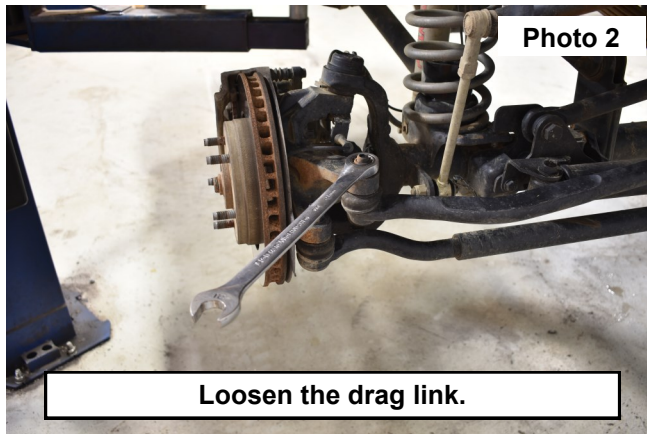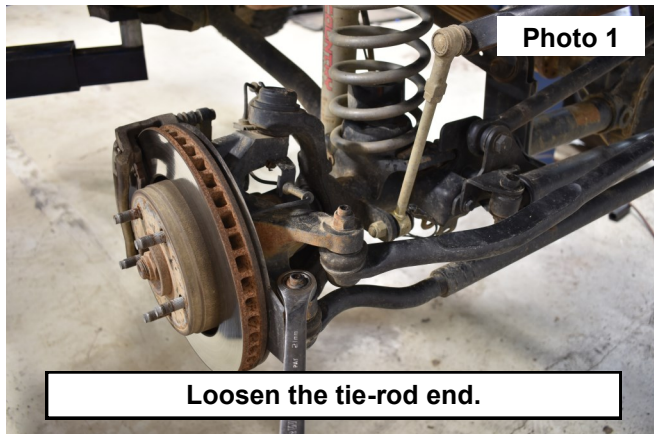


3. Use a hammer to dislodge the tie-rod and drag link ends. **See Photo 3.**
4. Remove the nuts from the tie-rod and drag link ends and remove from the knuckle. **See Photo 4.**

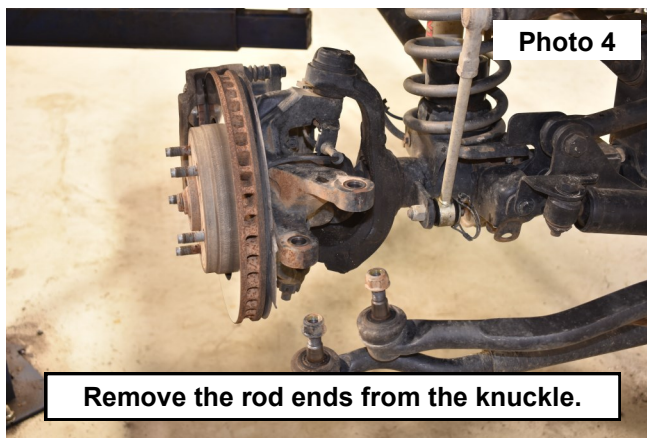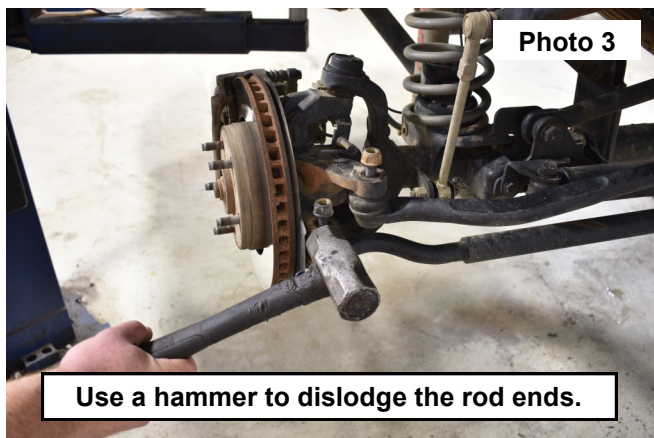



5. Remove the ABS line from the brake line clips. **See Photo 5.**
6. Using a 21mm socket, remove the (2) bolts from the brake caliper mount. Retain hardware. **See Photo 6.**
7. Remove the brake caliper and hang aside the frame in a safe place. **Do not hang from the brake line.**

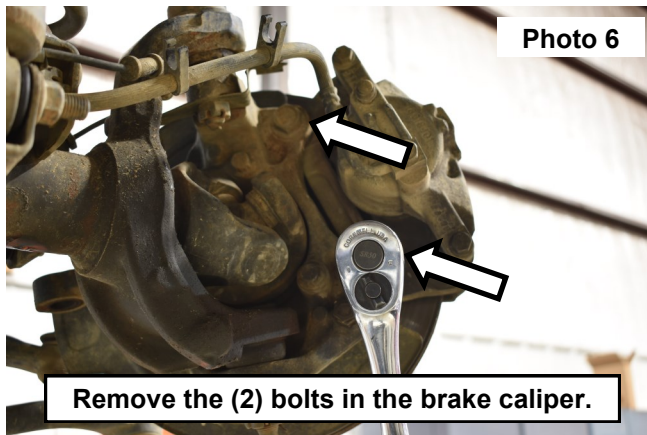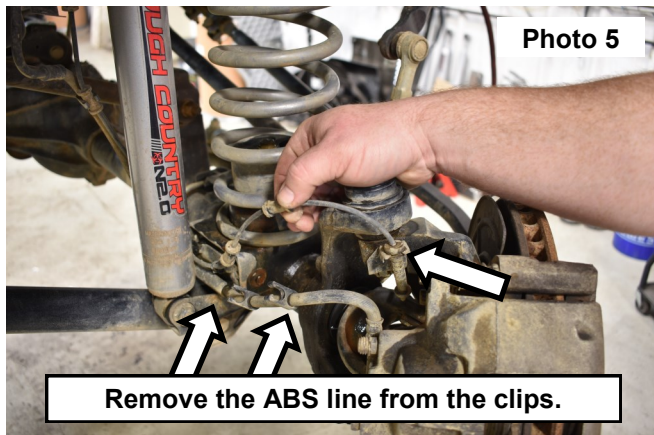


8. Remove the brake rotor from the hub. **See Photo 7.**
9. Use a 5mm Allen wrench to remove the ABS sensor bolt from wheel bearing. Retain hardware. **See Photo 8.**

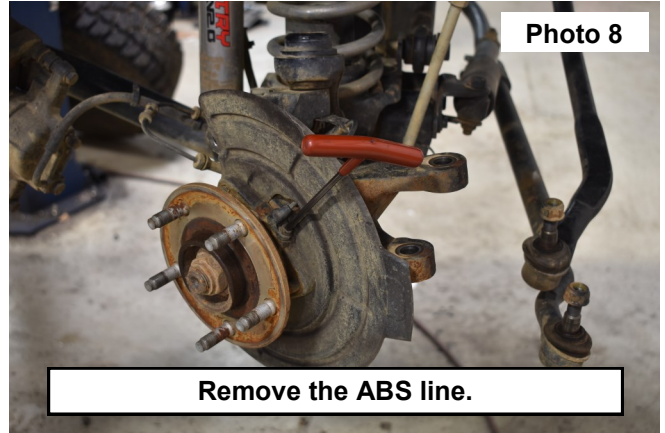



10. Use a **12 point** 13mm socket to remove the (3) wheel bearing bolts. **See Photos 9 and 10.**

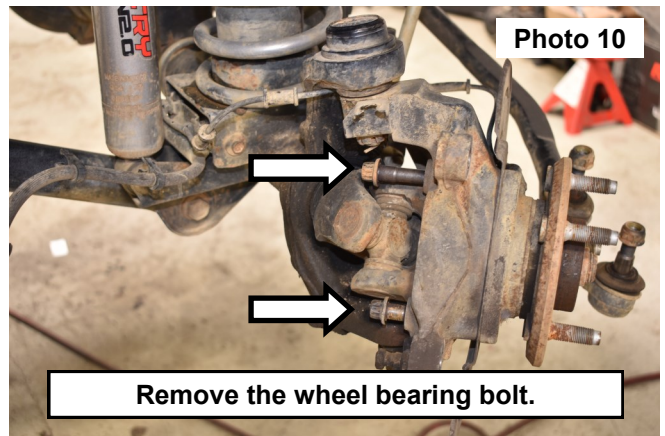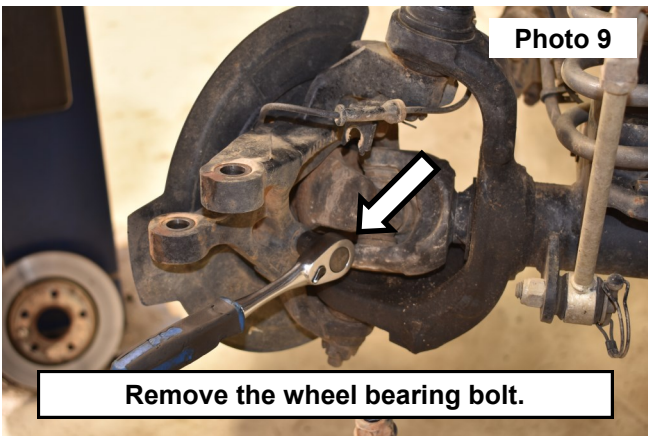



11. Use a 36mm socket to remove (1) axle nut from the wheel bearing. Retain hardware. **See Photo 11.**
12. Remove the wheel bearing and dust shield from the knuckle, remove the ABS line and hang in a safe location. **See Photo 12.**
13. Remove the axle from the vehicle. Set aside for later use.

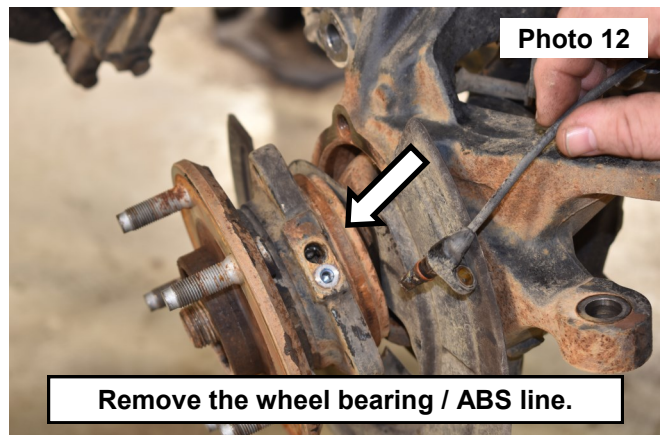



14. Remove upper ball joint nut using a 7/8 wrench. **See Photo 13.**
15. Remove lower ball joint nut using a 1 1/8 wrench. **See Photo 14.**

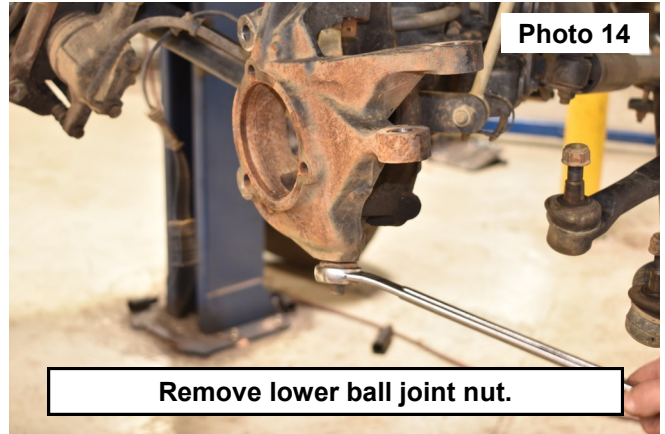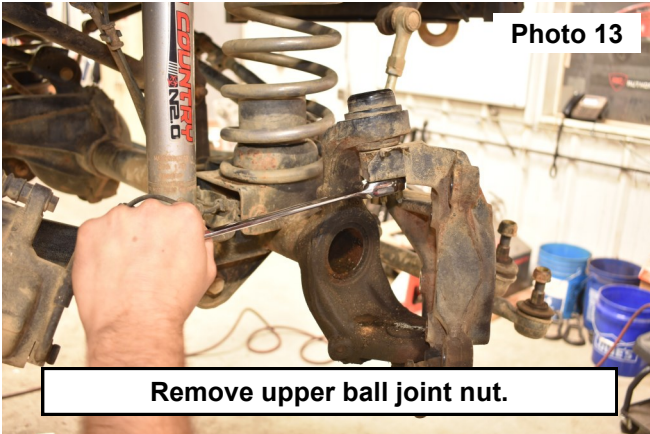

16. Use a hammer to unseat the upper and lower ball joint tapers. Then remove the knuckle from the vehicle. Retain knuckle. **See Photo 15.**
17. Use a ball joint press to remove the upper ball joint. **See Photo 16.**

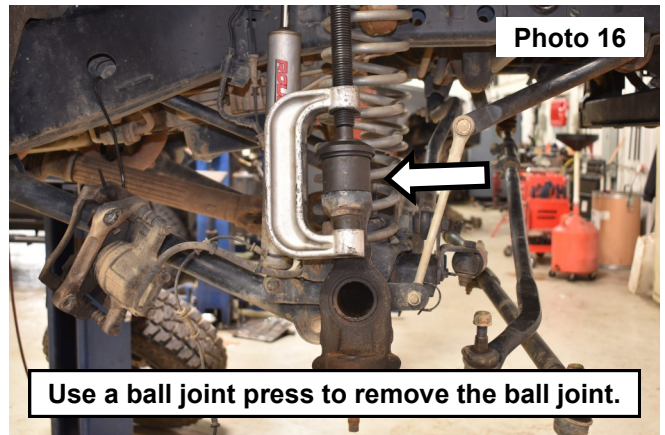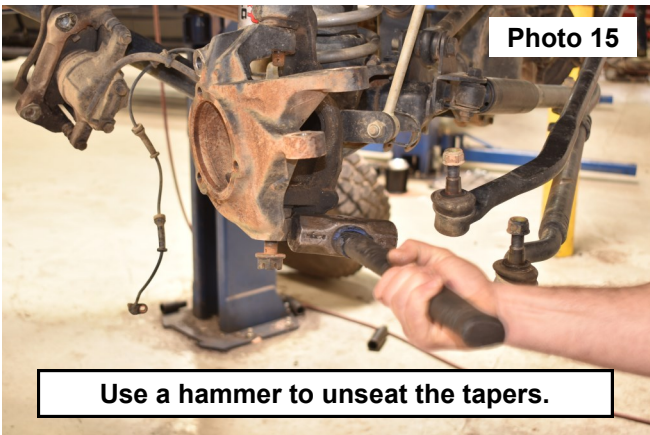


18. Remove the ball joint from the axle. **See Photo 17.**
19. Use a ball joint press to remove the lower ball joint. **See Photo 18.**

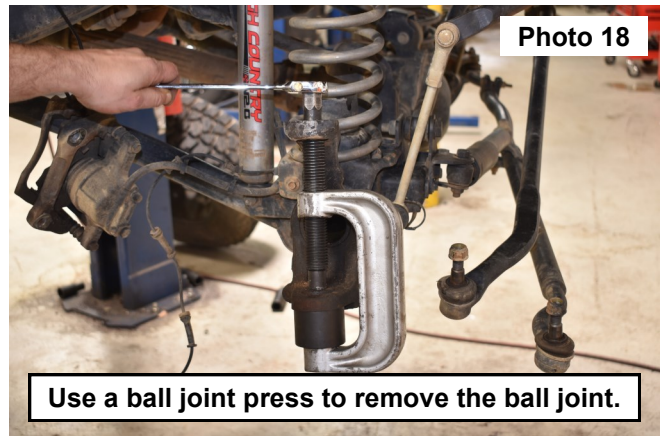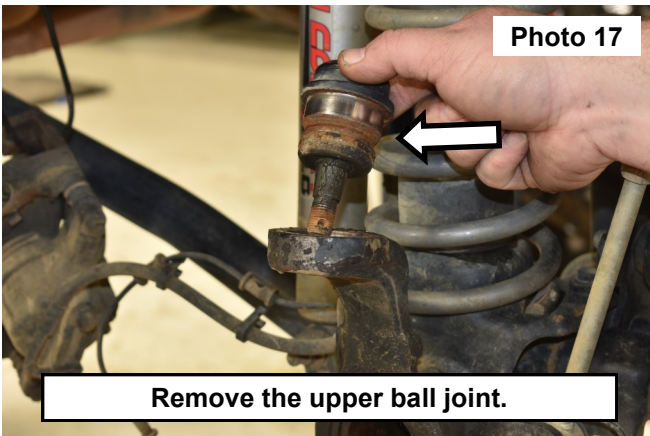



20. Remove the lower ball joint from the axle. **See Photo 19.**

21. Locate the lower ball joint. **See Photo 20.**


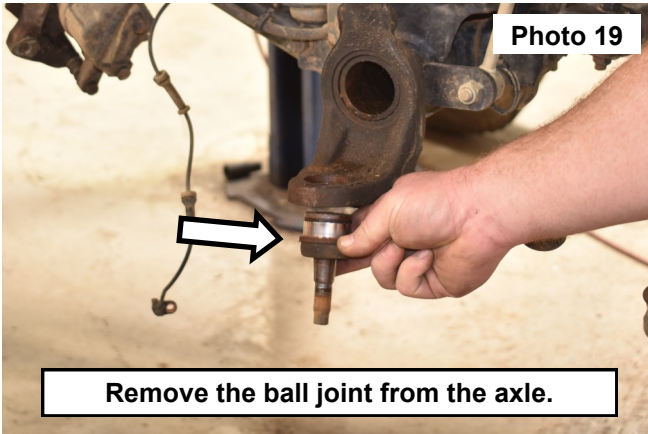


22. Install the ball joint so the grease fitting will be accessible from the rear of the axle. **See Photo 21.**



23. Install the lower ball joint into the axle using a ball joint press. **See Photo 22.**

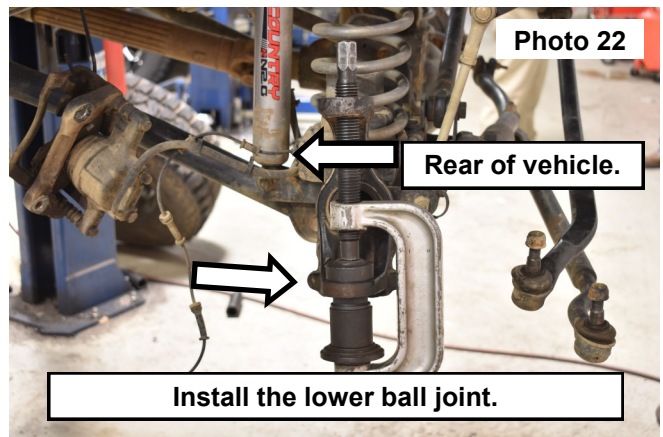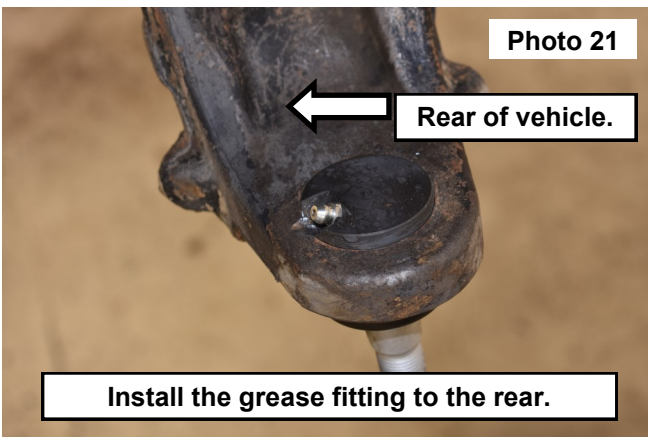


24. Depending on your grease gun check and make sure you can grease the ball joint. If not use a die grinder to clear-
ance the axle around the grease fitting. **See Photos 23 and 24.**

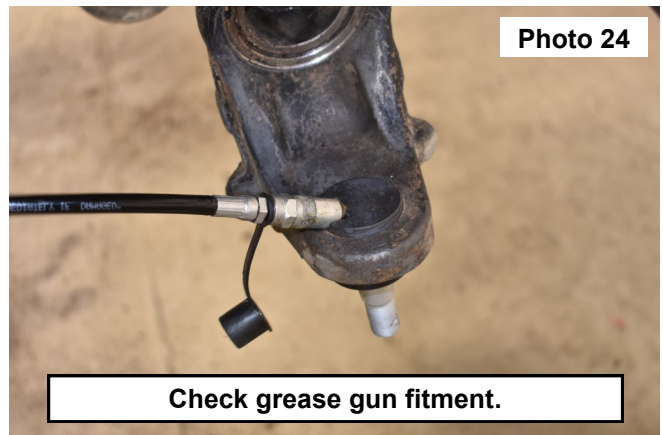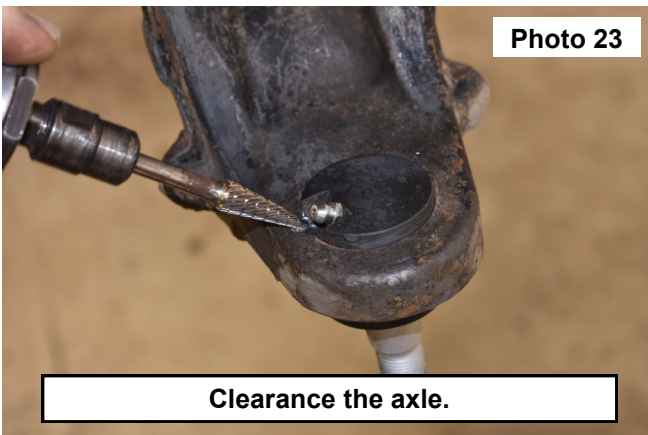



25. Locate the upper ball joint. **See Photo 25.**
26. Install the upper ball joint into the axle using a ball joint press. **See Photo 26.**

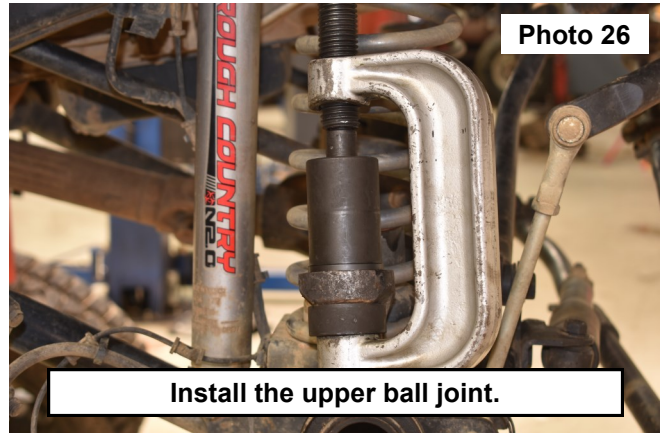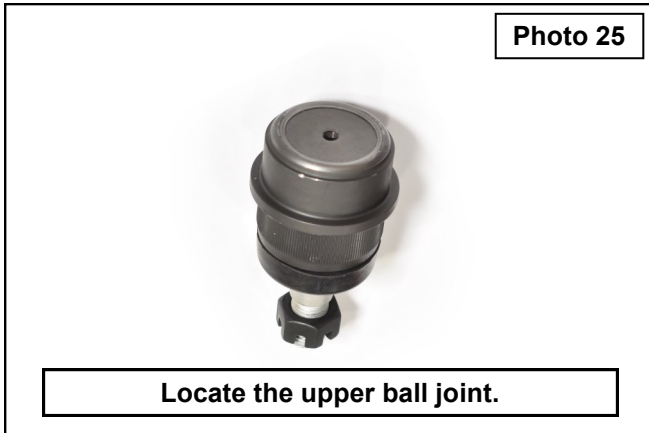

27. Install the grease fitting into the upper ball joint using a 7mm wrench. **See Photo 27.**
28. Install the knuckle onto the ball joints. **See Photo 28.**

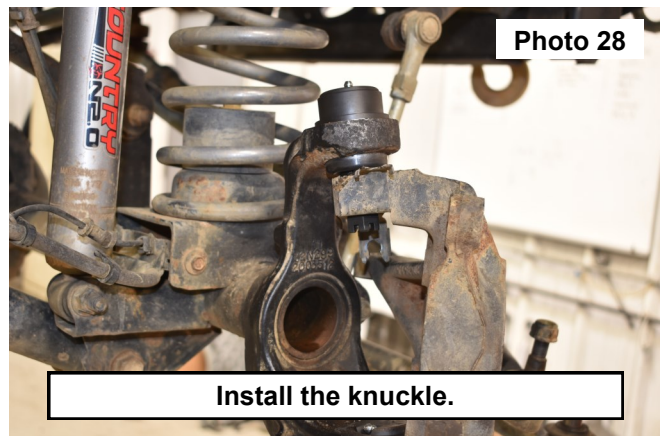

29. Secure the knuckle using the supplied nuts.
30. Tighten the upper ball joint nut using a 22mm wrench. **See Photo 29.**
31. Tighten the lower ball joint using a 1 1/16" wrench. **See Photo 30.**
32. Complete the assembly of the ball joint install by reversing steps 1-13.
33. Grease the upper and lower ball joints before driving and after 500 miles.

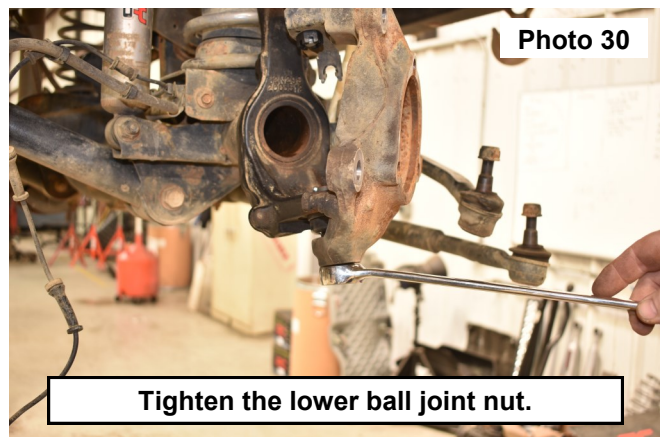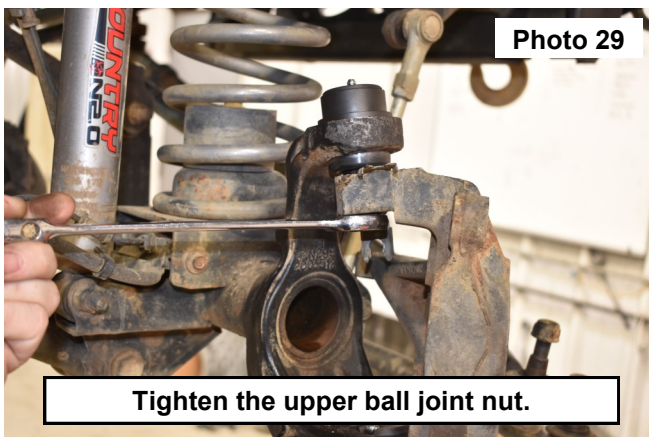

By purchasing any item sold by Rough Country, LLC, the buyer expressly warrants that he/she is in compliance with all applicable, State, and Local laws and regulations regarding the purchase, ownership, and use of the item. It shall be the buyers responsibility to comply with all Federal, State and Local laws governing the sales of any items listed, illustrated or sold. The buyer expressly agrees to indemnify and hold harmless Rough Country, LLC for all claims resulting directly or indirectly from the purchase, ownership, or use of the items.

