

**advanced FLOW engineering** Super Stock Air Intake System

**Instruction Manual** P/N: 55-10019R / 55-10019DR

Make: Toyota  
Make: Toyota

Model: Tundra  
Model: Sequoia

Year: 2022-2023  
Year: 2023

Engine: V6-3.4L (tt)  
Engine: V6-3.4L (tt)



- Please read the entire instruction manual before proceeding.
- Ensure all components listed are present.
- For technical support please call 951-493-7185.
- Ensure you have all necessary tools before proceeding.
- Do not attempt to work on your vehicle when the engine is hot.
- Retain factory parts for future use.



Label	Qty.	Description	Part Number
A	2	Air Filter (Pro 5R) For 55-10019R	30-10402R
A	2	Air Filter (Pro DRY S) For 55-10019DR	30-10402D
B	1	Tube, Black: Left (Driver Side)	05-5510019B1
B	1	Tube, Red: Left (Driver Side)	05-5510019R1
C	1	Tube, Black: Right (Passenger Side)	05-5510019B2
C	1	Tube, Red: Right (Passenger Side)	05-5510019R2
D	4	Clamp, 044 (2-5/16" – 3-1/4")	03-50019
E	2	Super Stock Urocal	06-00226


**Installation will require the following tools:**

8mm nut driver, 10mm nut driver

Warranty Information available at <https://afepower.com/contact#warranty>

**Emissions Disclaimer:** This product is not currently CARB exempt and is not available for purchase in California or for use on any vehicle registered with the California Department of Motor Vehicles.

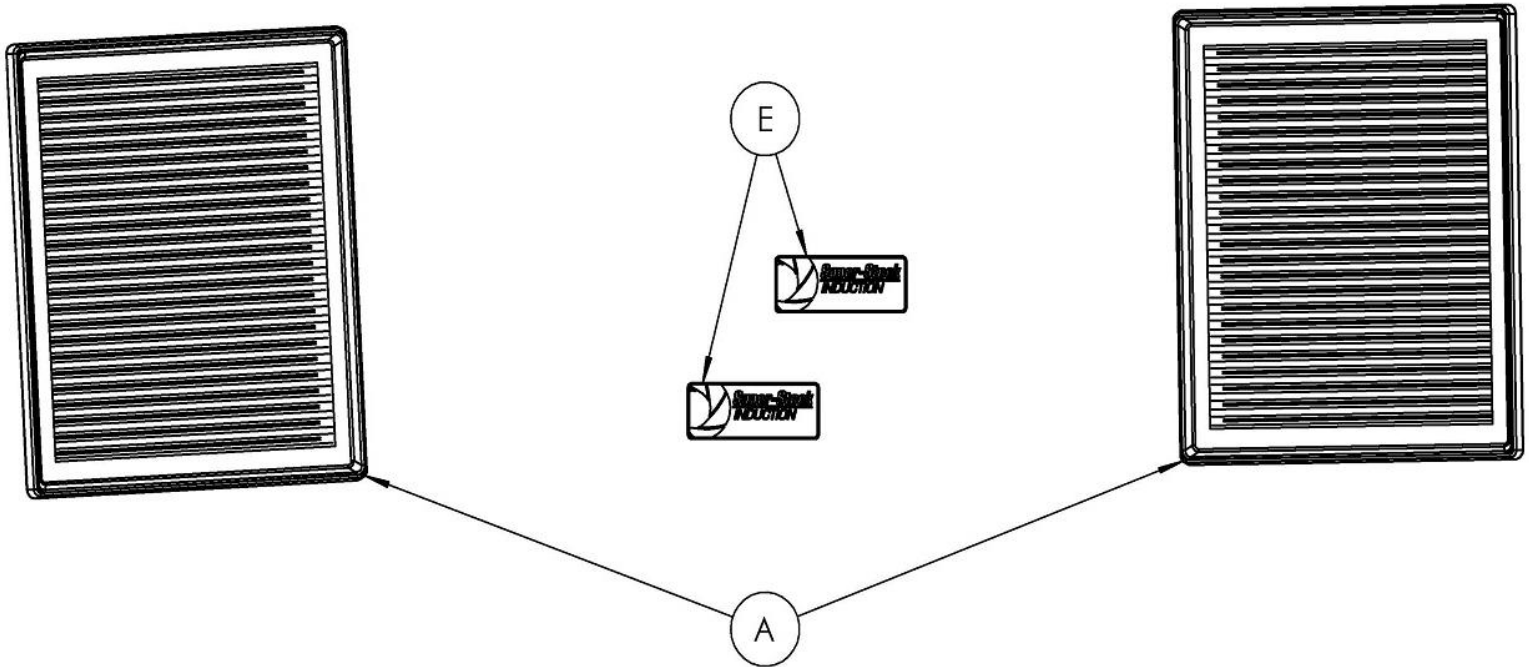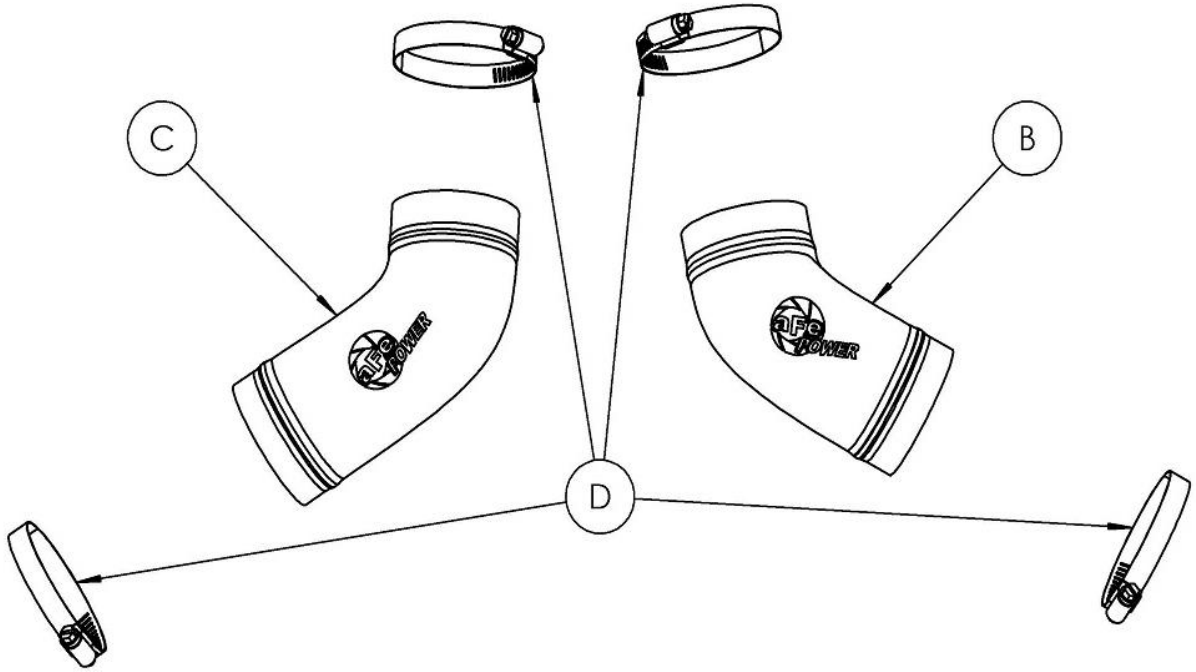

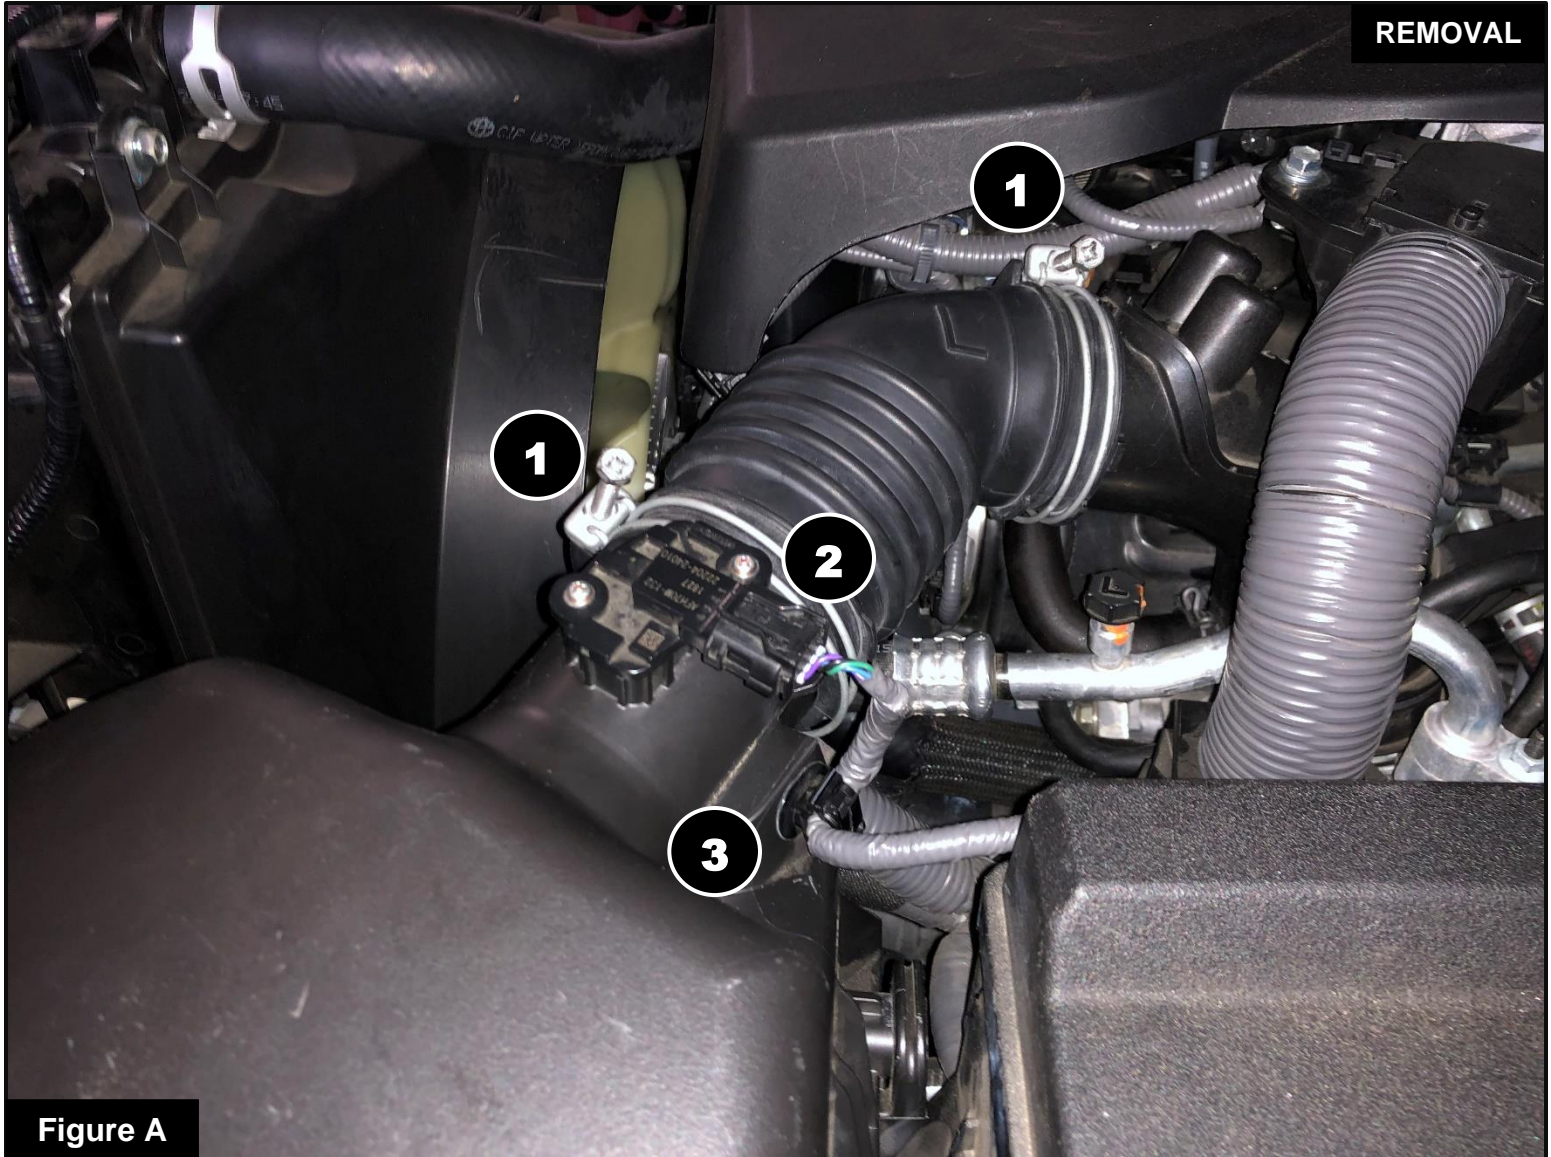**Figure A****Refer to Figure A for Step 1-2**

Step 1: Loosen both clamps ① on the left (driver side) tube using a 10mm nut driver.

Step 2: Unplug the left-side Mass Air Flow (MAF) ② sensor and unclip the harness from the airbox ③.




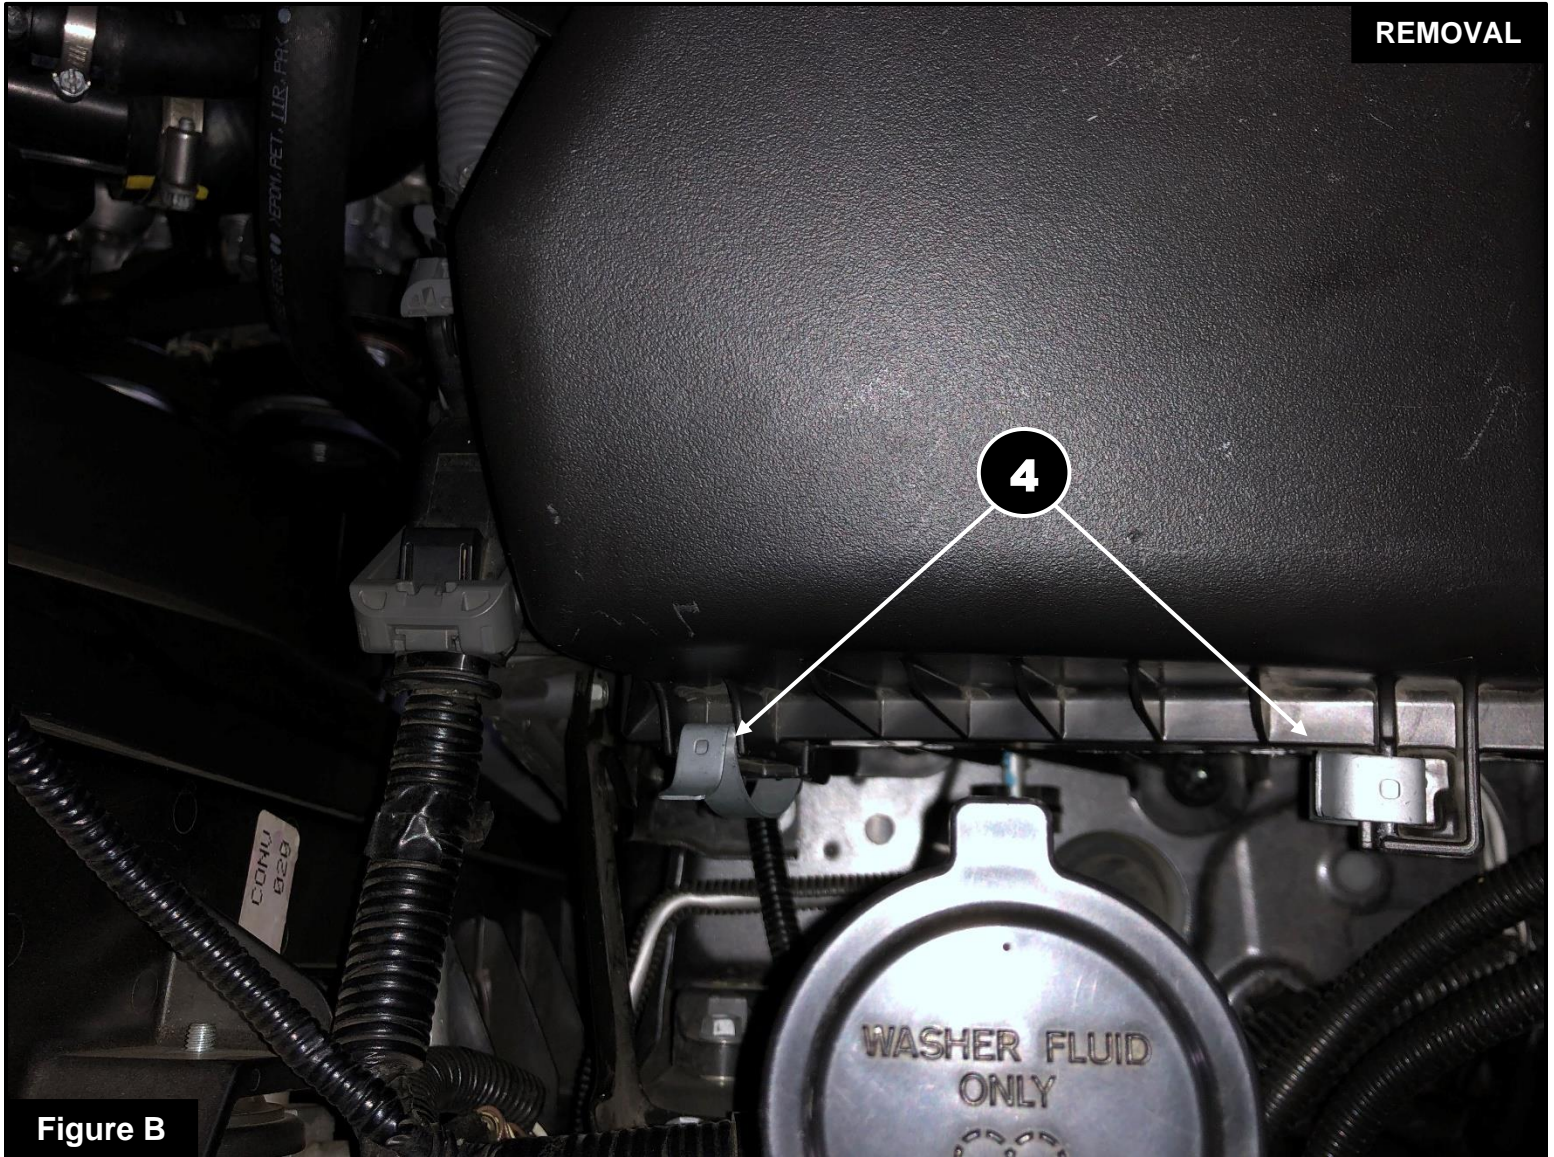


Figure B

**Refer to Figure B for Step 3**

Step 3: Undo both clips ④ securing the top of the left-side airbox.



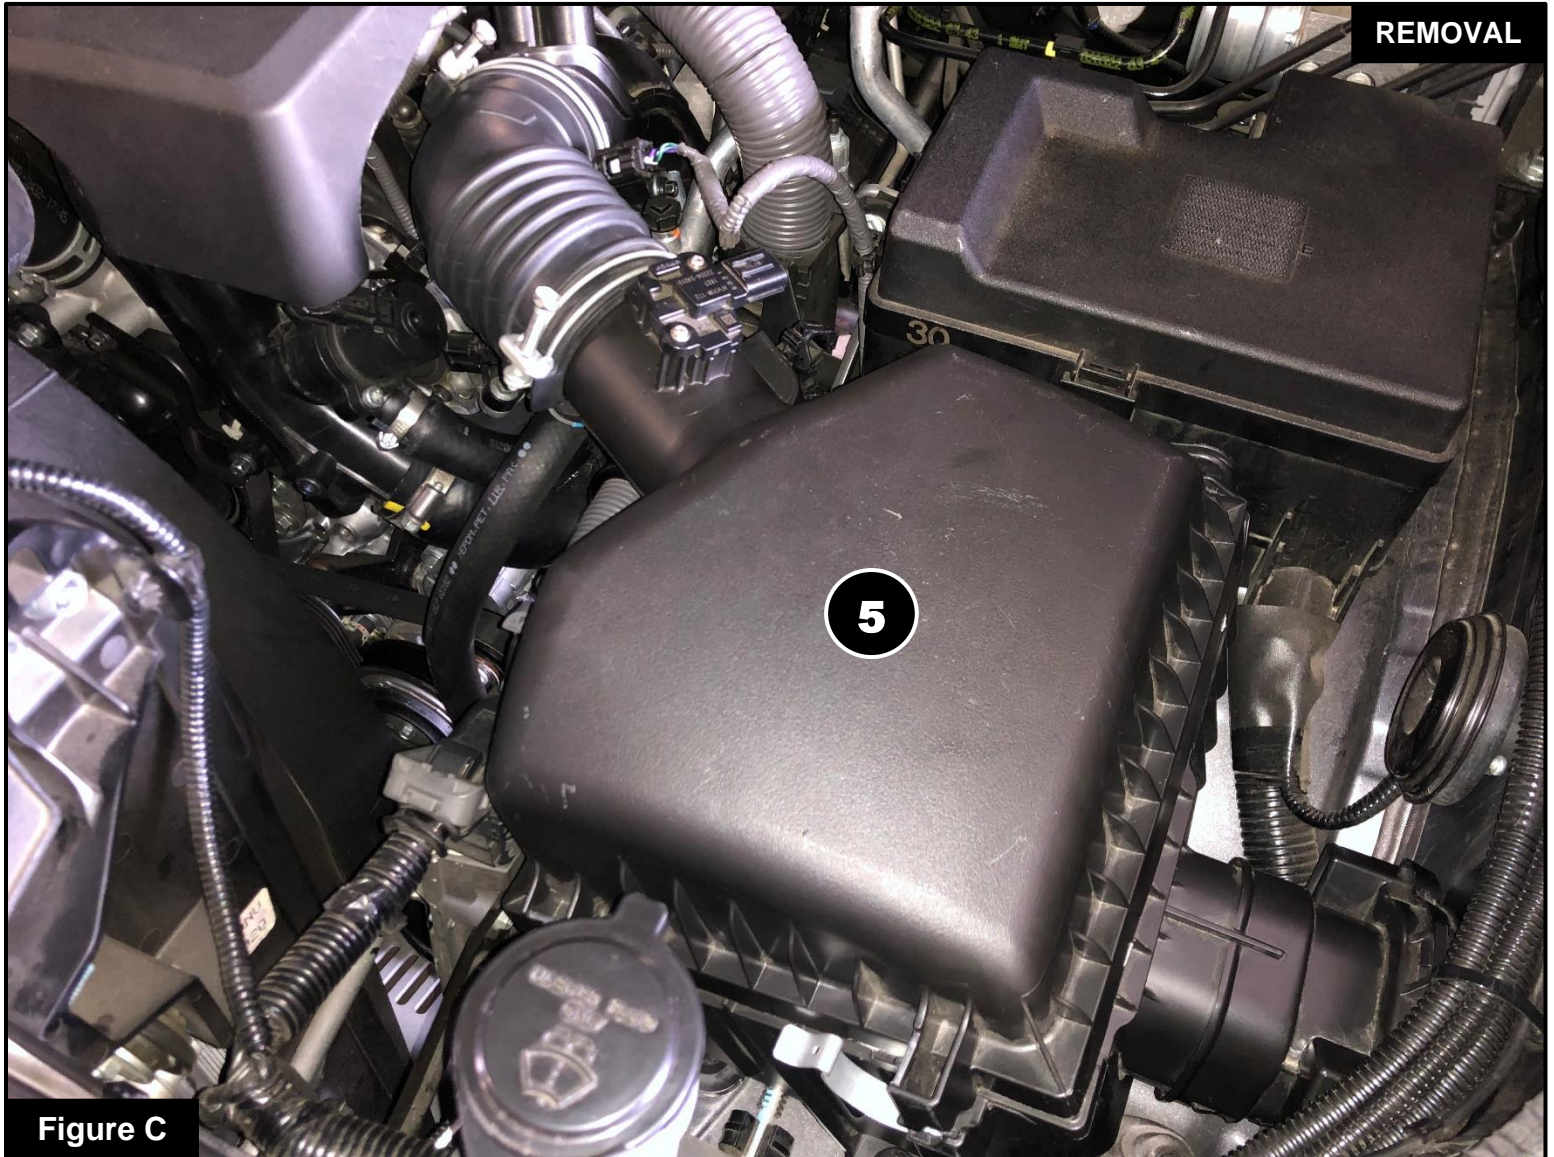

**Refer to Figure C for Steps 4**

Step 4: Lift the top of the airbox ⑤ and pull it away from the tube.





Figure D

**Refer to Figure D for Steps 5**

Step 5: Remove the factory tube ⑥ from the turbo inlet.



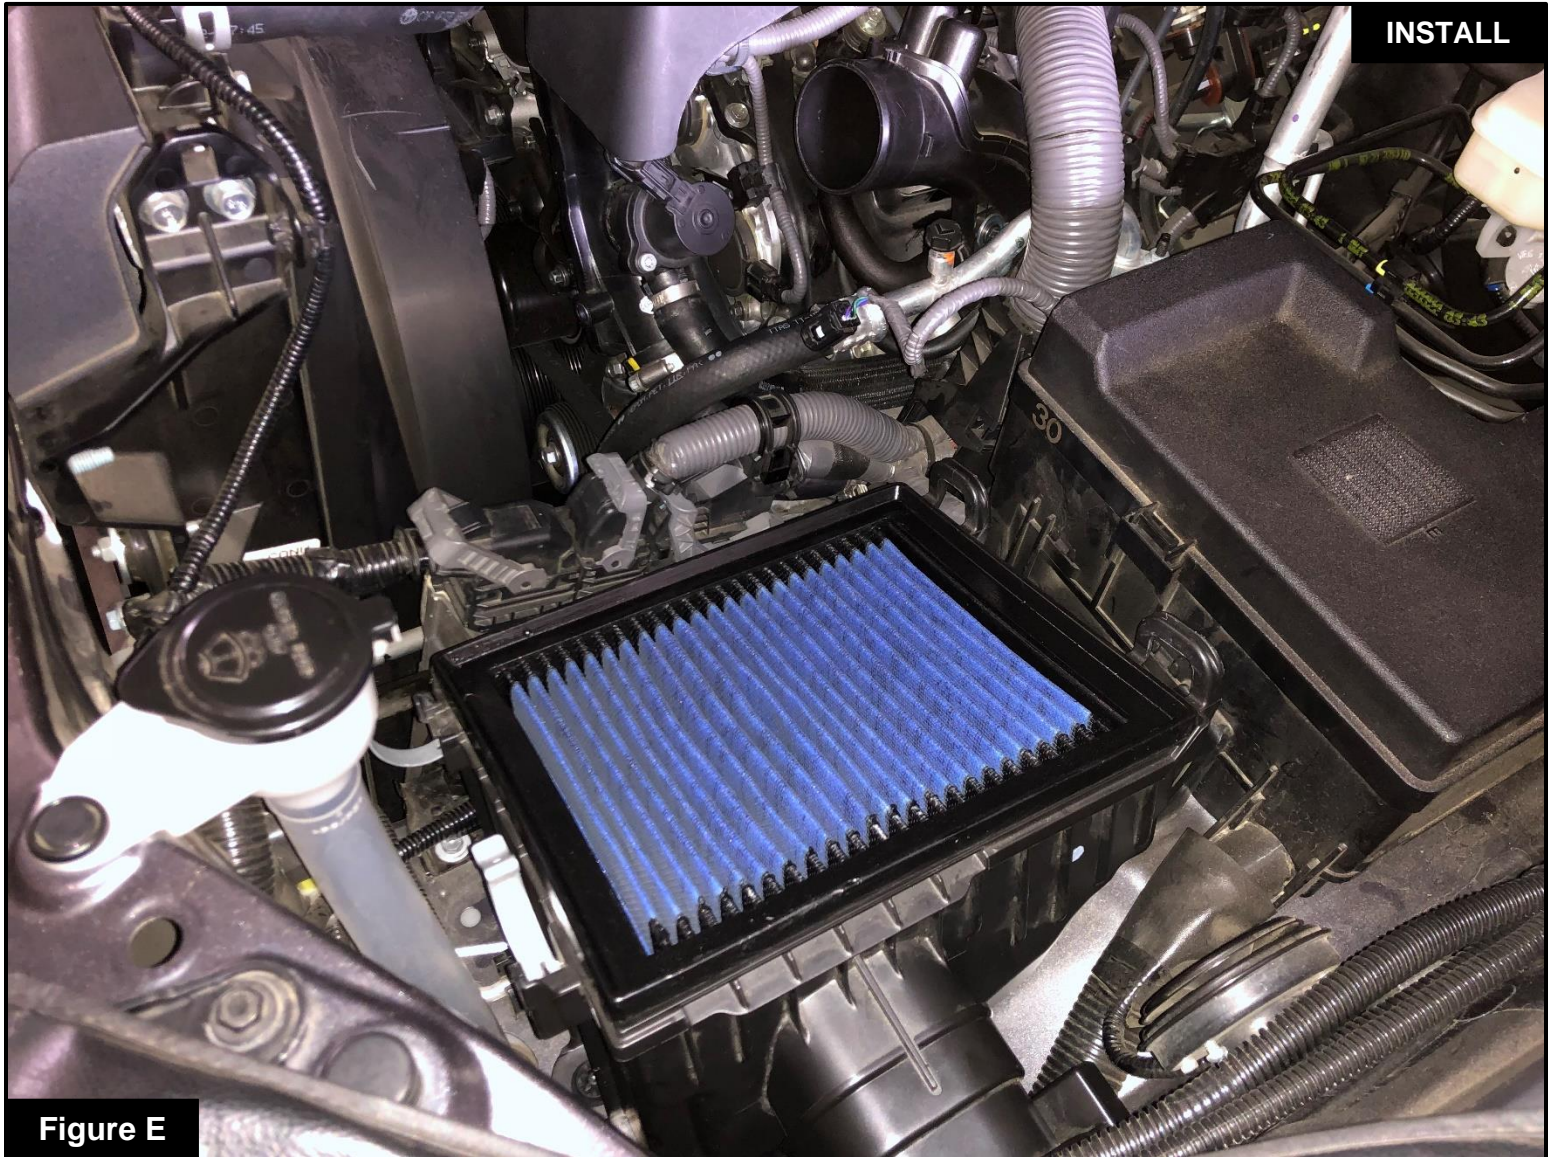


Figure E

**Refer to Figure E for Step 6**

Step 6: Remove the factory air filter and insert your aFe POWER performance air filter.



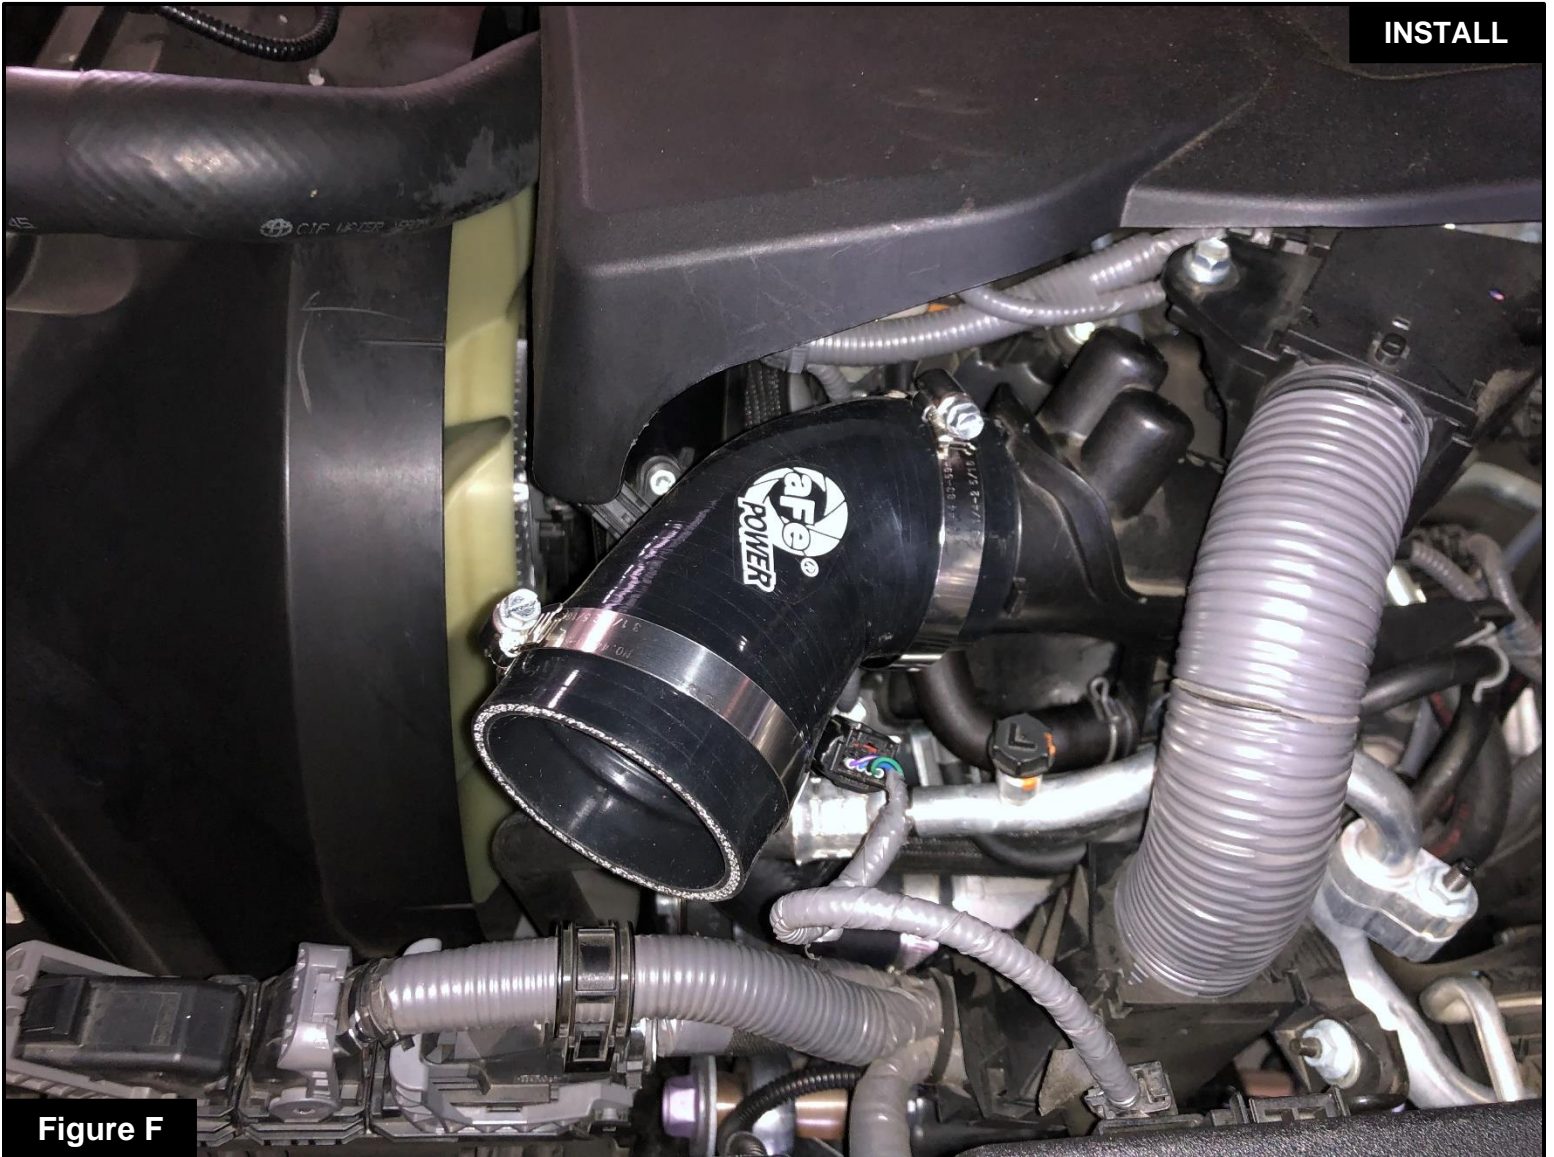



Figure F

**Refer to Figure F for Step 7-8**

Step 7: Attach the aFe POWER coupling, marked LEFT, to the turbo inlet.

Step 8: Place two hose clamps around the coupling but do not tighten them yet.



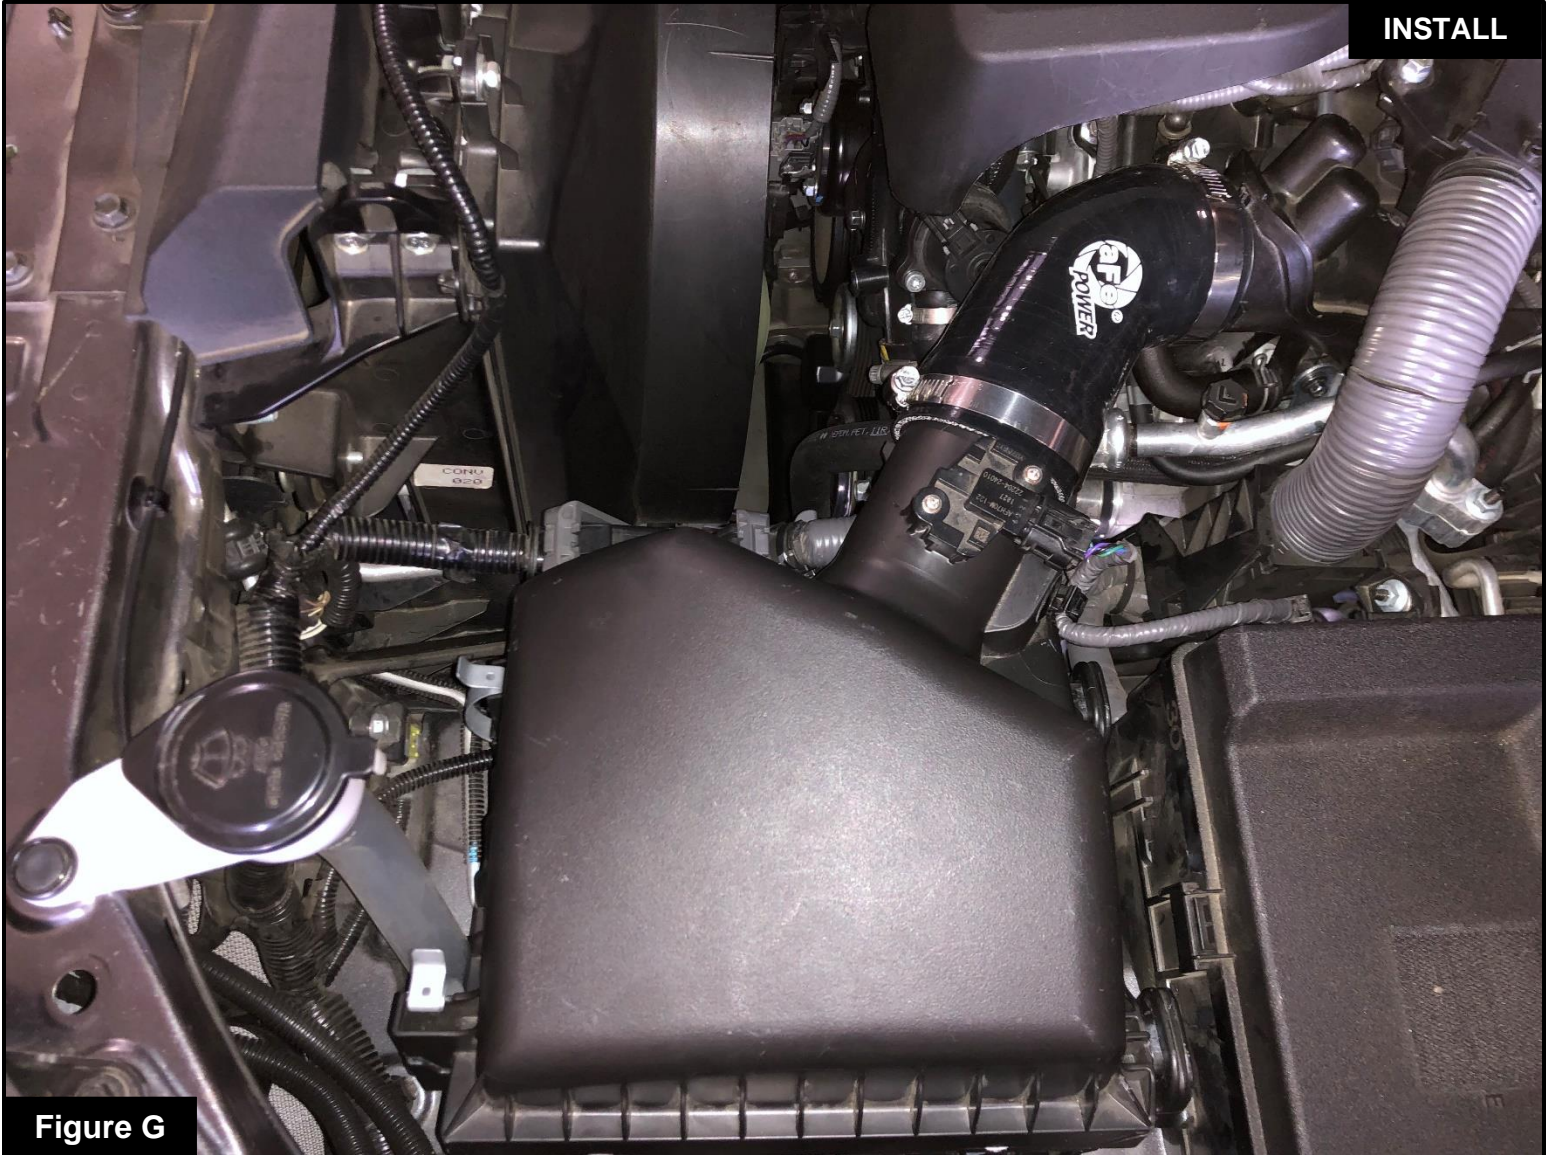**Figure G****Refer to Figure G for Step 9-12**


Step 9: First attach the top of the factory airbox to the coupling then slot the airbox back into place.

Step 10: Reattach the clips to the factory airbox.

Step 11: Plug in the MAF sensor and reattach it to the airbox.

Step 12: Make sure the coupling is properly aligned and seated at both ends before tightening both worm clamps using an 8mm nut driver.

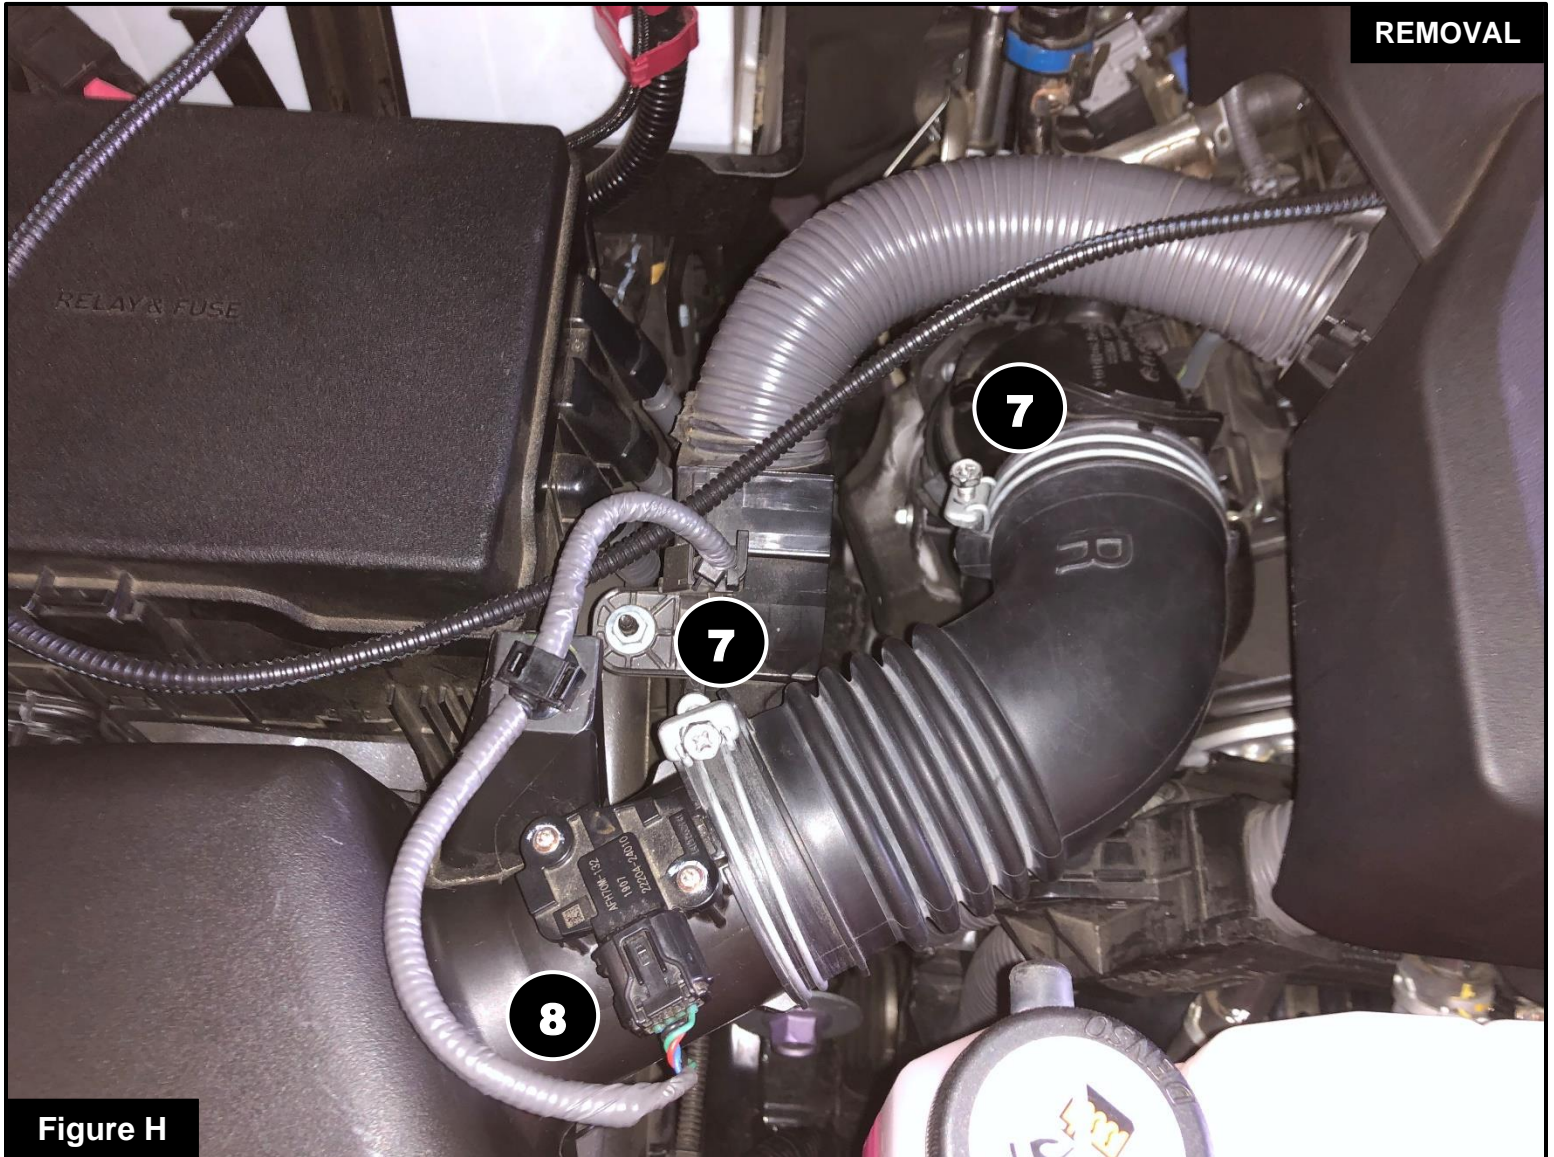

**Figure H****Refer to Figure H for Steps 13-14**

Step 13: Loosen both clamps (7) on the right (passenger side) tube using a 10mm nut driver.

Step 14: Disconnect the right-side MAF (8) sensor and unclip the harness from the airbox.



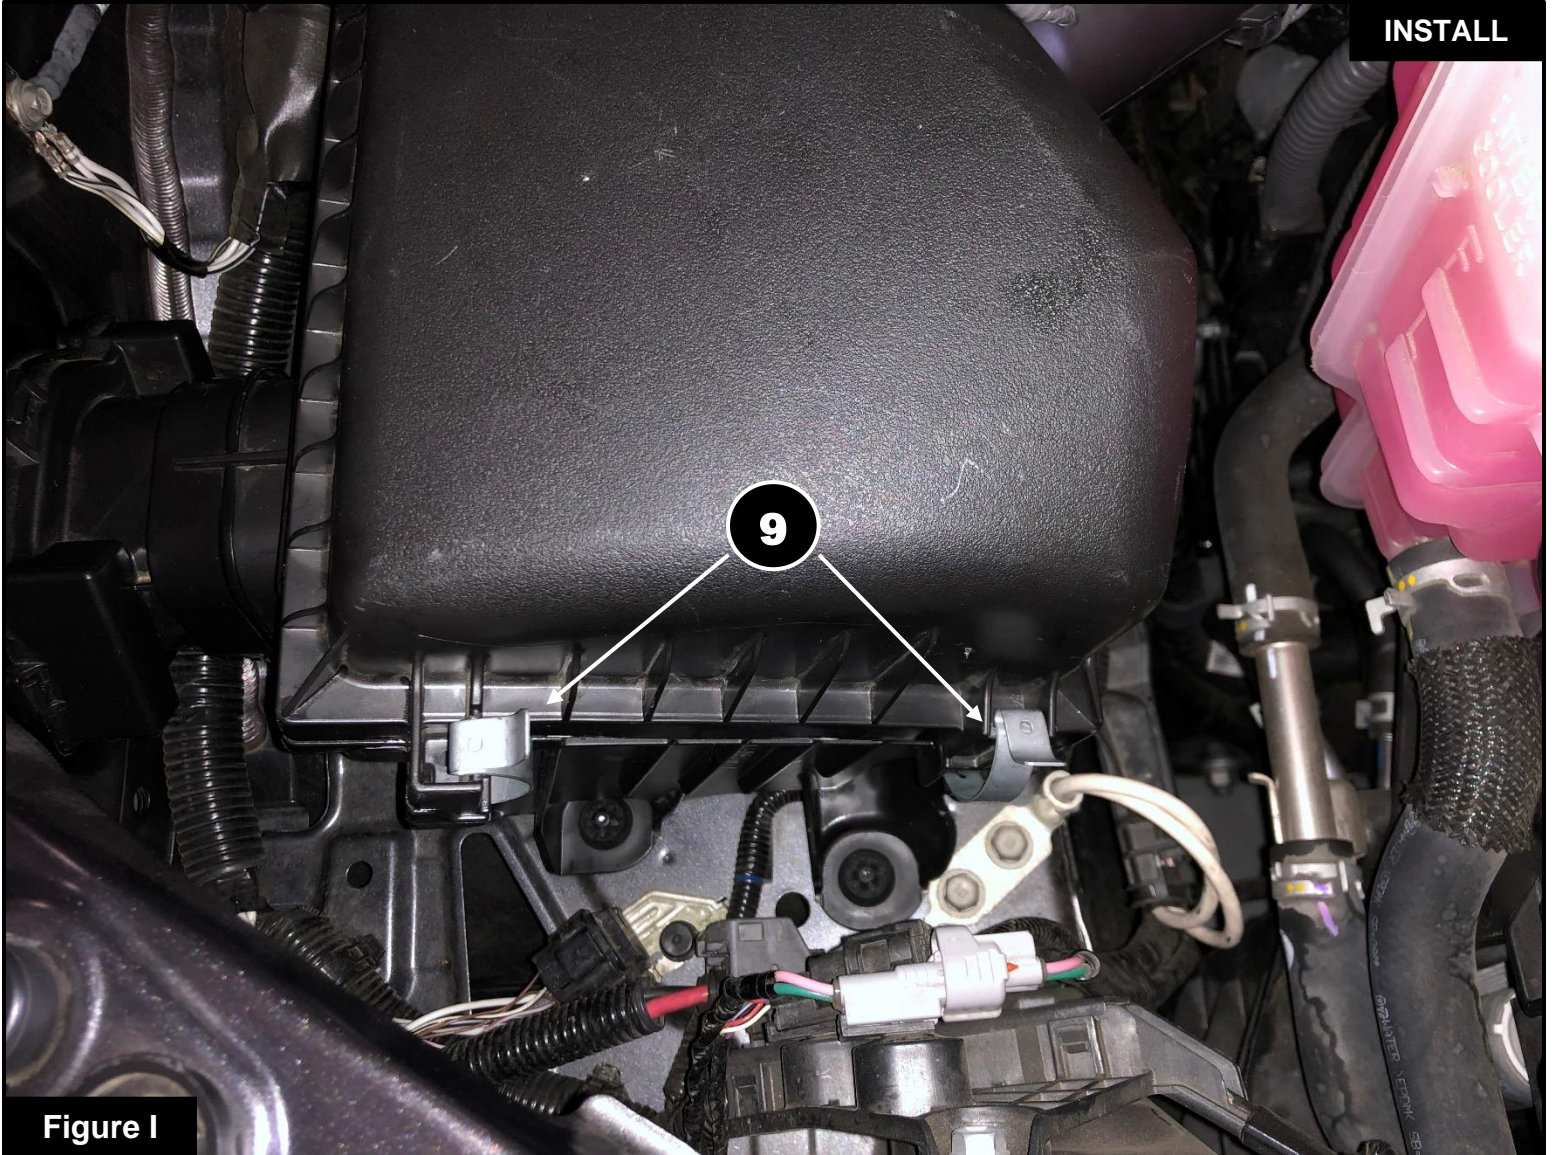


Figure I

**Refer to Figure I for Steps 15**

Step 15: Undo both clips ⑨ securing the top of the left-side airbox.





**Refer to Figure J for Step 16**

Step 16: Lift the top of the airbox (10) and pull it away from the tube.





Figure K

**Refer to Figure K for Step 17**

Step 17: Remove the factory tube (11) from the turbo inlet.





Figure L

**Refer to Figure L for Steps 18**

Step 18: Remove the factory air filter and insert your aFe POWER performance air filter.



**Figure M****Refer to Figure M for Step 19-20**

Step 19: Attach the aFe POWER coupling, marked RIGHT, to the turbo inlet.

Step 20: Place two hose clamps around the coupling but do not tighten them yet.



**Figure N****Refer to Figure N for Step 21-24**

Step 21: Attach the coupling to the factory airbox.

Step 22: Clip the top of the factory airbox back onto the bottom.

Step 23: Make sure the coupling is properly aligned and seated at both ends and, using an 8mm nut driver, tighten all clamps.

**Figure O****Refer to Figure O for Steps 25**

Step 24: You can install your included Super Stock urocal stickers anywhere you like! We chose to install them on the corners of both airboxes.

Step 25: Make sure all clamps and connections are secured. Your installation is now complete. Thank you for choosing aFe POWER!





PAGE LEFT BLANK INTENTIONALLY



***advanced FLOW engineering, inc.***

Corona, CA 92879

<https://afepower.com/contact>