



***baja designs***®  
THE SCIENTISTS OF LIGHTING

## 64-0127, RTL Automotive Wiring Harness Directions



2950 Norman Strasse Rd • San Marcos • CA • 92069

Phone 760-560-2252 x3 • Fax 760-560-0383

info@bajadesigns.com • [www.bajadesigns.com](http://www.bajadesigns.com)



**baja designs**<sup>®</sup>  
THE SCIENTISTS OF LIGHTING

## LIMITED LIFETIME WARRANTY

Baja Designs proudly offers a LIFETIME WARRANTY against manufacturer's defect on all the products that we manufacture.

These are comprehensive warranties; other than the exclusions below – you're covered. If your LED or HID bulb burns out, you're covered. Additionally, cutting off our connector or changing your lenses does not automatically void your warranty.

### **Exclusions:**

Installation errors, abuse, misuse or crash damage. You must be the original owner of the product and can supply proof of purchase.

Baja Designs manufactures its own products as well as resells products manufactured by others. Baja Designs makes no express or implied warranties on products not manufactured by Baja Designs including without limitation any warranties or merchantability and fitness for a purpose. We will however, pass on all warranties made by the manufacturer, who has sole responsibility for performing such warranties.

Baja Designs will pay the freight if your product is less than 90 days old, otherwise defective products must be returned to Baja Designs, Inc., freight prepaid. At our option, we will repair or replace items in question and return them at no charge. If the identical product is no longer available, we will replace with a similar product of equal value. Baja Designs Inc. will not be responsible for any indirect or consequential damages in connection with defective merchandise. Items purchased through a Baja Designs authorized dealer must be returned through the dealer. Only available on LED auxiliary lights and product must be in sellable condition at MSRP. Product that has been damaged in any way after the original purchase date will be excluded from this guarantee.

### **Indemnification:**

**Buyer hereby acknowledges off-roading, racing and driving at night are dangerous activities and that the products and/or supplies purchased from Baja Designs are used in an inherently dangerous activity that may endanger life and limb; and in no event shall the seller, or seller's heirs and assigns, be held liable for consequential damages, nor shall seller's liability on any claim for damages arising out of or connected with the sale, delivery, or use of purchased products and/or supplies exceed the purchase price of the products and/or supplies.**

**Buyer is responsible for ensuring that it uses the products (and its vehicle) in accordance with all applicable laws, regulations, guidelines, and standards of care. Buyer acknowledges that some products may only be used when off-roading, and Buyer will comply with all vehicle and road safety guidelines. Buyer is solely responsible for (and will indemnify and hold Bestop harmless for) any claims, losses, damages, fines, fees, costs, or other amounts arising out of Buyer's non-compliance with these provisions.**




**baja designs**<sup>®</sup>

THE SCIENTISTS OF LIGHTING

**64-0127, Automotive RTL Harness Instruction**

**Tools Required**

- 10mm or ½ socket (Battery terminal size)      - ¾" Drill

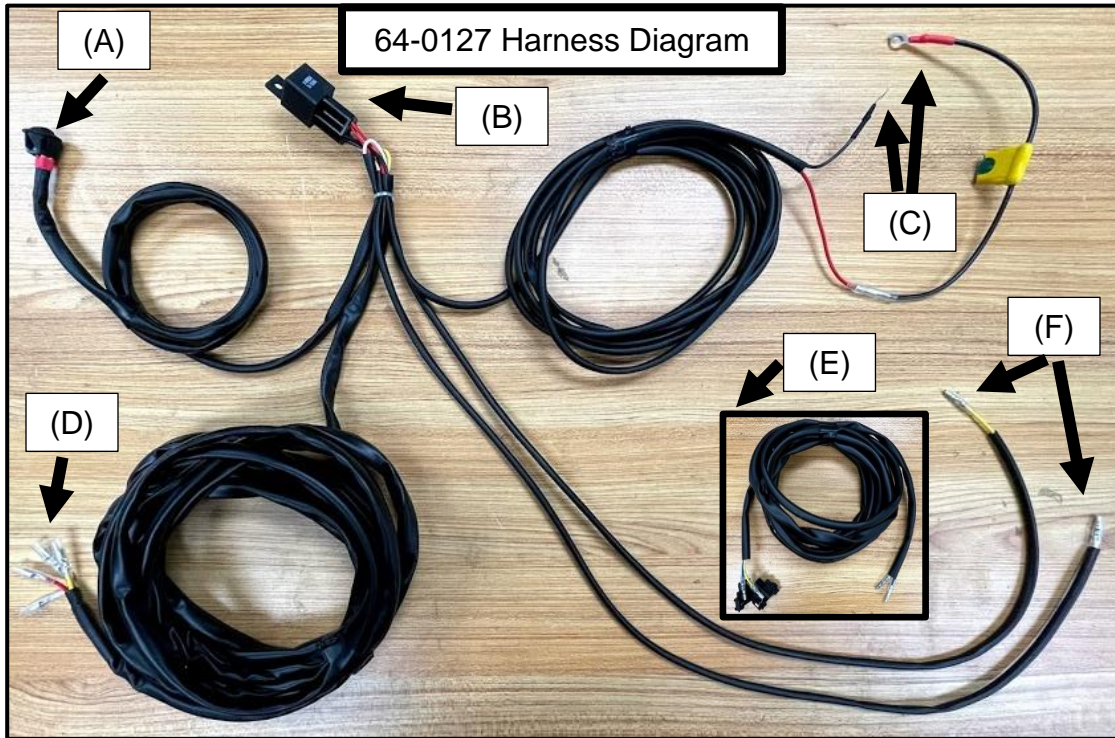

- |  |  |
|--|--|
| (A) Reverse Light Switch                                 | (D) RTL four wire lead                 |
| (B) Relay  | (E) Brake and Running light extensions |
| (C) (+) Positive and (-) Negative Battery Ring Terminals | (F) Brake and Running light leads      |

**Instructions:**    *\*Place vehicle in park, turn off, and disconnect the battery ground (-)\**

1. Route the RTL four wire lead (D) to the four wire side of the RTL and attach like colors. **(Black = Ground), (Yellow = Brake light), (Blue = Reverse light), (Red = Running light).**
2. Route the brake and running light leads (F) to the brake and running light trigger wires and attach to each respective circuit. An extension (E) is included if needed. **(White = Running light)**
3. Route the reverse switch (A) into the cab and mount into panel after drilling ¾" hole. Remove switch, route wires through, and reattach.
4. Mount relay (B) safe and away from hot, sharp, and/or rotating components.
5. Attach the positive (+) red battery lead (C) to your positive (+) white battery terminal and then repeat for the negative terminal (-). Reattach the battery ground (-) cable.

**Tie up all wires away from hot, sharp, and/or rotating components.**

**Your install is now complete! Thank you for choosing Baja Designs.**